




FIRMWARE UPDATE

CONNEX SERIES

1 FIRMWARE UPDATE

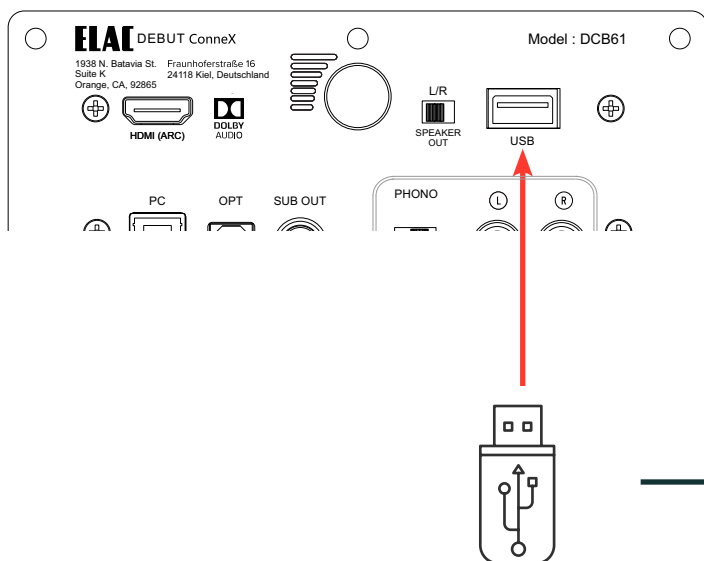

USB FLASH DRIVE :

You will need a USB drive smaller than 8 GB, and it needs to be formatted to FAT32 file system.

1. Turn Unit Off and leave off for 2 minutes to allow all internal voltages to deplete.
2. Uncompress the zip files and load onto to **ROOT DIRECTORY** of Flash Drive. Must be the **ROOT DIRECTORY**
3. Insert the USB drive as indicated by the red arrow and turn on AC power.
4. Programming will start automatically. LED will flash multiple colours to indicate upgrading in progress
5. Special attention!!: During the upgrade, do not remove the USB drive as it is highly likely to become bricked. Please be careful!!
6. Upgrade is successful, the LED will stop flashing.
7. You can now unplug the USB wait 2 minutes before applying power.
8. Note : Very important to wait 2 minutes prior to applying power or you may lose the update.